

RPS

Stackable Paving Support Pad

Overview

Low height stackable paving support pads are simple to install and build up height. A very economical method of creating clear space below the paving, allowing for rapid water drainage. For use on totally flat surfaces.

- Spacer tabs create a perfectly uniform gap between slabs
- Drainage holes ensure fast and efficient rainwater drainage
- Supports can be stacked to desired height - up to 6 high for RPS range, up to 10 high for RPS-HD range
- Supports can be snapped into halves or quarters for supporting slabs at edges or corners



Performance

Material	Polypropylene (recyclable)
Height range	RPS-HD - 15-150mm RPS - 10-60mm
Compression	RPS-HD - 1000kg RPS - 400kg
Spacer tab thickness	4mm
Biological/chemical	Resistant to moulds, algae, alkali, bitumen, UV

Sizes

Code	Product
RPS-10	10mm stackable paving support
RPS-15	15mm stackable paving support
RPS-3	3mm shim for finer height adjustment compatible with RPS-10/15
RPS-HD15	15mm heavy-duty stackable paving support
RPS-HD2	3mm heavy-duty shim for finer height adjustment compatible with RPS-HD15

Accessories



Edge spring clip


The edge spring clip fits on top of paving supports around the periphery of paved areas to ensure uniform spacing against wall abutments, helping ensure rapid drainage. By tensioning the tile bed, it counteracts creepage and movement.



Base shock pads

Base shock-absorbent membrane pads can be installed under the pedestal/support base to enhance acoustic properties, or to provide additional protection to the waterproof system.

Compatible Systems

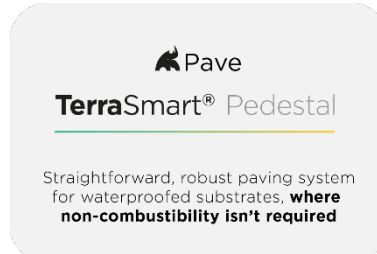

Got questions?

Speak to one of our expert advisors

Visit www.rynogroup.co.uk or call us today on **+44 (0)203 967 3500** or reach out on sales@rynogroup.co.uk.